

## Induction Motor for Pedestrian Transportation in Benz Circle Vijayawada

GURRAM NARENDRA SANTOSH KUMAR<sup>1</sup> AND A. SRINATH<sup>2</sup>

<sup>1,2</sup>*Mechanical Engineering Department*

*Koneru Lakshmaiah Education Foundation*

*Guntur, 522302 India*

*E-mail: santoshnarendral@gmail.com<sup>1</sup>; srinath@kluniversity.in<sup>2</sup>*

Congestion in India has turned into an intense issue as it comes about into an expanding rate of mishaps, contamination and so forth. Shopping edifices and a few different focuses, where a recognizable get-together happens, dependable face such movement issues and subsequently people on foot get the opportunity to endure predominantly. So an elective alternative for people on foot is particularly essential. In this paper, the emphasis is given on a solution for the above issue by considering a place called BENZ CIRCLE in Vijayawada took after by plan, investigation of the future answer for Pedestrians. A moving (expanding) stage pushed by LIM portions is proposed as a mean of pedestrianization, which will transform the general population starting with one point then onto the next. The point of the paper is to plan and examine the Pedestrian Transportation framework and furthermore to legitimize the need for the framework.

**Keywords:** public transportation, induction motor, moving walkway, traffic congestion, accelerating speeds

### 1. INTRODUCTION

Congestion on street in India has turned into an all-inclusive wonder specifically urban communities, particularly urban areas like Vijayawada, Hyderabad, Kolkata, Mumbai, Delhi, Bangalore and so forth which still don't have fast mass transportation system [1, 2] coming about accidents and substantial activity with contamination and at last a gigantic suffering to the people on foot. A national overview writes about street accidents is given in Table 1. In the light of Table 1, the quantity of accidents is plotted as year shrewd in Fig. 1.

In 2015, a sum of 5,01,423 street accidents was accounted for by all States/Union Territories. Of these 26.3 for every percent (1,31,726) were fatal accidents. The number of people executed in street accidents was 1,46,133 *i.e.*, a normal of one casualty for every 3.4 accidents. The quantity of street accidents, street accidents fatalities and people harmed in street accidents in India amid 2005 to 2015 has appeared in Table 1. Furthermore, from Fig. 1. That throughout the years 2005 to 2015, add up to the number of street accidents, killings and wounds have expanded by 14.2 for each percent, 53.9 for each percent and 7.5 for every percent respectively [3, 4] The quantity of street accident killings has been expanded alarmingly finished the years 2005 to 2015.

The extent of deadly accidents in absolute street accidents has reliably expanded since 2005 from 19.0 for each percent to 26.3 for each percent in 2015 [5]. The seriousness of street accidents, estimated as far as people murdered per 100 accidents has addi-

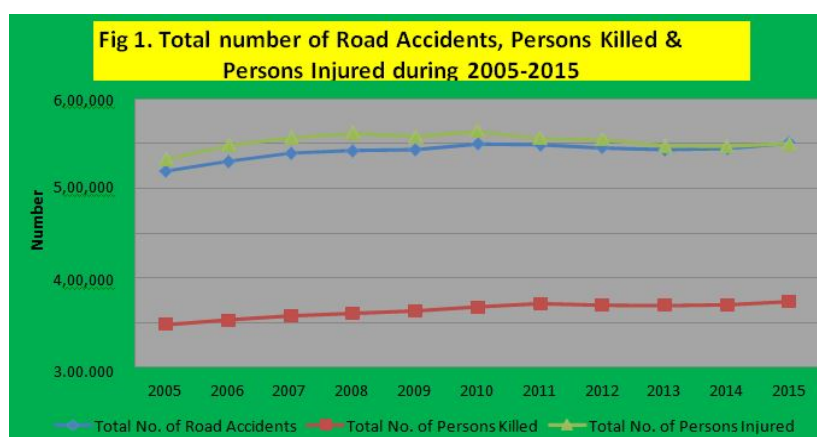


Fig. 1. Design among sum of accidents happened in 2005-2015.

**Table 1. Number of road accidents and number of persons affected: 2005-2015.**

Year	Number of Accidents		Number of Persons		Accident Severity*
	Total	Fatal	Killed	Injured	
2005	4,39,255	83,491 (19.0)	94,968	465,282	21.6
2006	4,60,920	93,917 (20.4)	105,749	496,481	22.9
2007	4,79,216	1,01,161 (21.1)	114,444	513,340	23.9
2008	4,84,704	1,06,591 (22.0)	119,860	523,193	24.7
2009	4,86,384	1,10,993 (22.8)	125,660	515,458	25.8
2010	4,99,628	1,19,558 (23.9)	134,513	527,512	26.9
2011	4,97,686	1,21,618 (24.4)	1,42,485	5,11,394	28.6
2012	4,90,383	1,23,093 (25.1)	1,38,258	5,09,667	28.2
2013	4,86,476	1,22,589(25.2)	1,37,572	4,94,893	28.3
2014	4,89,400	1,25,828(25.7)	1,39,671	4,93,474	28.5
2015	5,01,423	1,31,726(26.3)	1,46,133	5,00,279	29.1

tionally expanded from 21.6 to 29.1 out of 2015. Regardless of a few urban communities consuming Rapid Transit System, problems not illuminated on occasion adequately. The principal purpose for this is the absence of a mix between the current methods of transport frameworks which are required to finish the excursion of a client. In this manner, individuals dependably like to utilize their own vehicle for satisfying the motivation behind their movement serenely. In any case if the hole between different travel alternatives accessible can be filled by reasonable transportation framework, people utilizing their own autos may locate the current fast travels framework more appealing, subsequently maintaining a strategic distance from the utilization of individual autos. BENZ CIRCLE in Vijayawada, India is an unmistakable case wherein although the Four National expressway courses were associated with have travel choices like Public transports, bicycles, autos, lorries and so forth exist, the private auto travellers still discover awkward to move around and carry out their activity by utilizing their own autos. It is unnecessary to specify that this outcome in blockage on streets and inconvenience especially for the walkers in this locale.

An answer for this has been proposed here, which recommends a stage moving at around 4-10 kilometers for every hour along with the courses secured from Benz Circle, so individuals can make a trip starting with one point then onto the next along with the hover effortlessly and comfort. The point of the current document to coordinate issues with current framework by giving fundamental secured system. The geometry of the course by chance aides limiting the end impacts which generally by and large influence the exhibitions of LIM grounded framework.

## 2. PEOPLE MOVER SYSTEM (PMS)

By and large, the transport line is utilized for conveying materials starting with one place then onto the next in the industry. In any case, it can likewise be utilized for conveying the general population starting with one point then onto the next. This kind of framework is generally found in airplane terminals to convey the travelers and is called Travellator [6-8]. A Sample walkway travellator was installed in Delhi airport which is Asia's longest 118.5m long as shown in Fig. 3 where travellators were utilized with high intensity in India. The case under thought in this document Benz circle Place, Vijayawada, India takes exceptionally uncommon geometry with four highways associated with circle as appeared in Fig. 2. Notable of this place are tabulated in Table 2.



Fig. 2. Map view of BENZ CIRCLE Vijayawada.

**Table 2. Dimension of Benz circle.**

S. no	Parameter	Length in Meters
1	Diameter	50
2	footpath	5

The guests going to the Benz hover for work, shopping or on the other hand tourism have two alternatives *i.e.* Use of Regular vehicles to achieve Benz circle and after that move around or achieve their goal by utilizing taxi, transport or by strolling or an individual vehicle to achieve locale and likewise to their work environments [9, 10].



Fig. 3. Moving walkway in Delhi airport.

While in the previous it deals with stopping the issue at the cost of guest's distress, that in the last-mentioned however helpful it adds to the issue of auto stopping, wastage of vitality with clamour and ecological contamination. The elective arrangement that future here will go about as a differentiator between the current open frameworks influences the visit of pedestrians to the Benz to circle agreeable, advantageous and temperate while at the same time diminishing air and commotion contamination, movement clog with a significant sparing in vitality utilization [11-13].

### 3. SUGGESTION FOR BENZ CIRCLE

The suggested model might bring a new look and experienced system to the place of location. Technically this type of motor is linearly inherent to provide motion control path as a walking pathway. Universally this brings a new network system for communicating people easily. There are so many benefits comparing to another motor. Comparatively, as Benz circle is communicated with heavy traffic this suggestion would be needful to the passengers flowing through it.

### 4. SYSTEM ADVANTAGES

There are some fundamental favourable circumstances of the framework. Above all else utilizing LIM over Rotary motors will helpfulness. Furthermore, from the traveller perspective additionally, the framework has some recipient focuses.

1. Adhesion may not be a controlling variable to the generation of exertion like so if there should arise an occurrence of turning engines. Wheels are essential for rolling contact as it were.

2. Here no incessant begin the transport line is uniform so the particular vitality utilization will be minimized.
3. The task will be soothing and agreeable. The framework will deliver no Ecological contamination. It makes no mischief nature.

## 5. SYSTEM PROPOSED

The structure of LIM in figure attracted Fig. 4, the base, the round fundamental circuit is settled. By then there will be a discretionary coordinating sheet which is an Aluminium plate and it is supported by press. The basic and discretionary will be assigned and the reason behind that has been legitimized in the accompanying area [14, 15]. The desired arrangement will be alone sided settled basic longitudinal movement machine. A smidgen of the system will look like Fig. 5 underneath.

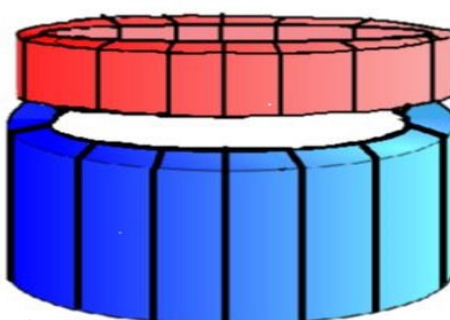


Fig. 4. designed LIM system.

Individuals will remain on a stage set up on the optional back iron. The entire framework inside steel confines with a shade over the make a beeline for shielding the traveller from sun and rain. Here likewise be a moving railing alongside the two sides of the moving stage for the general population to hold [16-18]. Presently the moving stage must be upheld on a suspension component and must be guided also against any undesirable parallel powers. There are different sorts of Suspension Cum Guidance framework alternatives accessible are

- Roller and Plate
- Ball and Plate
- Permanent Magnet
- Electromagnetic Levitation

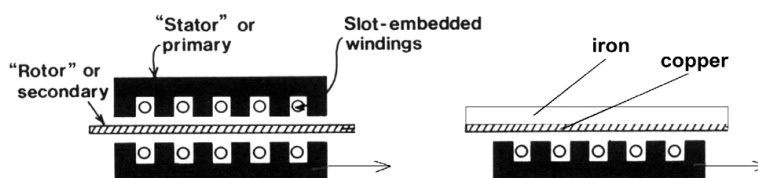


Fig. 5. Primary and secondary coils of LIM.

## 6. LIM SEGMENTS

The entire roundabout stage can't be made of a solitary piece as it isn't monetarily practical. There will be a few indistinguishable sections. When outline one-piece is finished the same rehased for whatever is left of the parcel. The essential part of around geometry. The 50-meter measurement circle is comprised of around 65 LIM portions. Every one of them is around 2.4 meters long with 1.20-meter-wide to cover the one-kilometre border [19]. The sectioned essential and the optional framework have just been portrayed in Fig. 4. All the LIM sections are indistinguishable henceforth just a single LIM essential part has been considered for investigation. Along with the hover, there will be an irrelevantly little hole between neighbouring LIM sections. Preferably this ought not to be there to stay away from attractive intermittence. The electrical intermittency has been maintained a strategic distance from end loops Occupy end openings of the nearby LIM portions [20]. Because of this game plan, the end impacts because of discontinuities in the attractive and electric circuits have been limited. Fig. 6 demonstrates the course of action of portions with top view, further broadens the view [21]. Each LIM essential part portion has been designed with the goal that every one of the sections when setting sideways the edge of the circle meets detail of the general population mover framework in Table 3.

Determination of frequency of task alongside both pole and slot pitch is basic advance the outline of LIM to touch the working necessities given in Table 3. Presently the specialized are given in Table 4.

Concerning to the above data, the Design parameters were taken for a LIM segment and the specifications are in Table 5.

**Table 3. Input parameters for strategy.**

S. No	Parameters	Assigned values
1	Length of individual segment	2.40 meter
2	Operating speed	5-10 kilometer per hour
3	Slip	20%
4	Deadweight	500Tones
5	The average weight of a passenger	58kgs
6	Maximum Force required per each segment	220N

**Table 4. Selection of pole pitch and slot pitch.**

Frequency	Synchronous speed for 2M/S	
25	40	13

**Table 5. Design sheet.**

Parameters	Value assigned	Parameters	Assigned value
Mechanical clearance	5mm	Secondary thickness	5mm
Slot width	8mm	Depth of slot	22mm
Width of segment	5mm	Width of segment	50mm
Slot pole per pitch	1.0	Phase current	1.8A
Slip	20%	Synchronous speed	2 meter/secs

## 7. ANALYSIS

Providing the outline sheet out there for one LIM fragment execution examination are conveyed. Here one stage is breaking down and for the whole framework, the outcome will be repetitive as the whole LIM fragments zone unit indistinguishable. For simplified methodology, the parameter approach or the equivalent circuit strategy has been utilized to break down the framework utilizing the composed information removed from the plan talked about in the past segment. In Figs. 7 and 8 the outcomes zone indicated wherever the speed-force qualities for one portion took after by power factor versus speed are imagined. In this manner, the most power required for system will just be taken by the system as appeared in underneath plot. At the predefined speed, the machine can work positively.

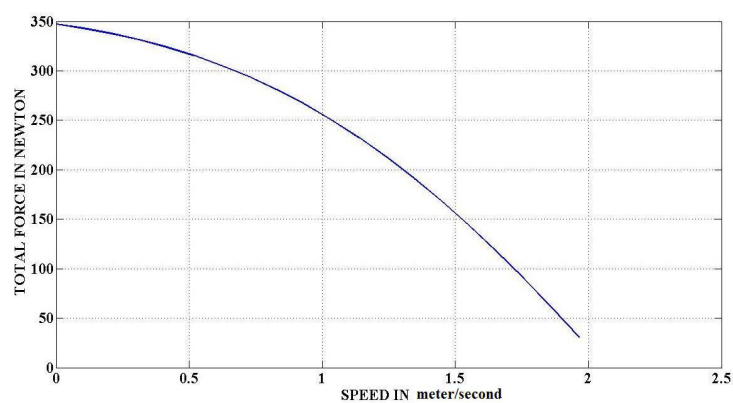


Fig. 6. Force vs. speed for LIM segment.

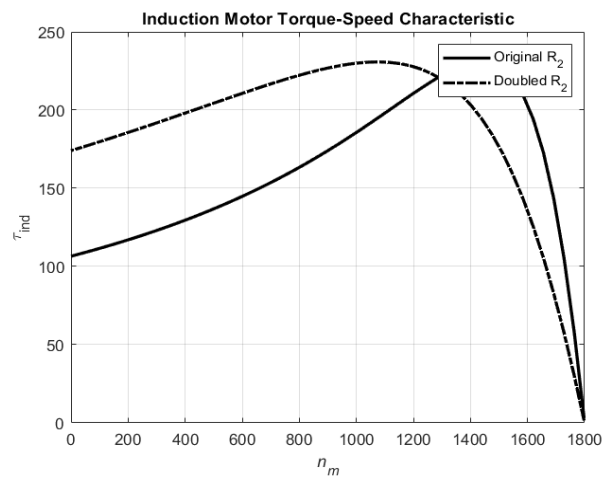


Fig. 7. Plot among current vs. speed.

## 8. PARTS OF MECHANICAL COMPONENT

Some of the dimensions are tabulated below concerning mechanical components.

**Table 6. Dimensions of mechanical components.**

Sl. No	Individuals	Dimensions
1	Width of the platform	1500
2	The thickness of the platform	8-16
3	The diameter of the wheel	200
4	Moving handrail height	900
5	Moving handrail thickness	90

## 9. CONCLUSION

The arrangement clarified in this document is particularly for the BENZ CIRCLE. It can't be utilized wherever as individual's mover framework. Benz Circle is having an exceptionally uncommon geometry of being circular, this idea is developed. Passengers Being in a heavy crowd at that place we created a model to eliminate all the restrictions caused due to heavy traffic and other allegations. This system may Introduce a new advanced concept in transportation system where people can transfer from one place to another in a positive manner.

## 10. FUTURE WORK

As the work implemented here was gone through some specified technologies may be extended to future scope in the form of algorithm procedure by developing neural network programming or an artificial intelligence which may enhance the optimization techniques to make the moving platform smoothly.

## REFERENCES

1. M. D. S. Medhavi and A. K. Srivastava, "Development of effective urban road traffic management using workflow techniques for upcoming metro cities like Lucknow," *International Journal of Hybrid Information Technology*, 2008, Vol. 1, No. 3.
2. H. Panda and R. S. Pundir, "Problems and possible solutions for better traffic management: A case study of Vadodara-Ahmadabad section of national highway eight," Research Paper 19, Institute of Rural Management, India, 2002.
3. J. T. Reason, "Too little and too late: A commentary on accident and Incident Reporting," in T. W. Schaaf, D. A. Lucas, A. R. Hale, *Near Miss Reporting as a Safety Tool*, Butterworth-Heinemann, 1991, pp. 9-26.
4. P. Sreejith, "Accelerating moving walkway – An in-depth study an in-depth analysis of the pros and cons of accelerating moving walkway," 27d4pai9ji3et-25, 2017.
5. I. Kusumaningtyas and G. Lodewijks, "Accelerating moving walkway: A review of the characteristics and potential application," *Transportation Research Part A*, Vol.



- 42, 2008, pp. 591-609.
6. G. N. S. Kumar and A. Srinath, "Exploration of accelerating moving walkway for futuristic transport system in congested and traffic areas," *Journal of Advanced Research in Dynamical and Control Systems*, Issue 6, 2018, pp. 616-624.
7. G. Kang and K. Nam, "Field-oriented control scheme for linear induction motor with the end effect," *IEE Proceedings – Electric Power Applications*, Vol. 152, 2005, pp. 1565-1572.
8. P. E. F. da Silva, E. B. dos Santos, and M. de Oliveira, "Vector control for linear induction motor," in *Proceedings of IEEE International Conference on Industrial Technology*, Vol. 1, 2003, pp. 518-523.
9. G. J. F. Gieras and A. R. Eastham, "Performance calculation for single-sided linear induction motors with a double-layer reaction rail under constant current excitation," *IEEE Transactions on Magnetics*, Vol. 22, 1986, pp. 54-62.
10. I. Takahashi and T. Noguchi, "A new quick-response and high-efficiency control strategy of an induction motor," *IEEE Transactions on Industry Applications*, Vol. 5, 1986, pp. 820-827.
11. G. N. S. Kumar and A. Srinath, "An ergonomical conditions of pedestrians on accelerating moving walkway: A people mover system," *International Journal of Mechanical and Production Engineering Research and Development*, Vol. 8, 2018, pp. 1376-1381.
12. D. Rockwood and D. Garmire, "A new transportation system for efficient and sustainable cities: development of a next-generation variable speed moving walkway," *Sustainable Cities and Society*, Vol. 14, 2015, pp. 209-214.
13. R. Scarinci, I. Markov, and M. Bierlaire, "Network design of a transport system based on accelerating moving walkways," *École Polytechnique Fédérale de Lausanne*, School of Architecture, Civil and Environmental Engineering, Transport and Mobility Laboratory, Switzerland, 2017.
14. Y. Abe, Y. Beniya, and H. Masuda, "Accelerating moving walkway 'ACCELLINER'," in *Proceedings of the 8th International Conference on Automated People Movers*, 2004, pp. 1-10.
15. K. Ikizawa, H. Nagai, S.-I. Aoe, T. Sato, R. Okuno, and T. Yanagisawa, "Development of an accelerating walkway," *NKK Technical Review*, No. 84, 2001.
16. A. Yugandhar, G. N. S. Kumar, and A. Srinath, "Design of a new generation moving walkway for congested city areas," in *Proceedings of International Conference on Automation and Computational Engineering*, 2018, pp. 8-13.
17. I. Takahashi and Y. Ohmori, "High-performance direct torque control of an induction motor," *IEEE Transactions on Industry Applications*, Vol. 25, 1989, pp. 257-264.
18. S. P. Bhamidi, "Design of a single-sided linear induction motor (SLIM) using a user interactive computer program," Ph.D. Thesis, Department of Electrical Engineering, University of Missouri, Columbia, 2005.
19. G. F. Nix and E. R. Laithwaite, "Linear induction motors for low-speed and stand-still application," in *Proceedings of Institution of Electrical Engineers*, Vol. 113, 1966, pp. 1044-1056.
20. S. Težak, D. Sever, and M. Lep, "Increasing the capacities of cable cars for use in public transport," *Journal of Public Transportation*, Vol. 19, 2016, pp. 1-16.

21. A. Yugandhar, A. Srinath, P. R. Prasad, Y. K. Chakravarthy, and R. Venkatesh, "Design and analysis of a multi-drive moving walkway for public transportation," *Journal of Advanced Research in Dynamical and Control Systems*, Vol. 10, 2018, pp. 1469-1474.



**Gurram Narendra Santosh Kumar** received his master's degree in Machine Design from Jawaharlal Nehru Technological University Hyderabad in 2017. Currently, he is a Research Scholar in the Department of Mechanical Engineering, K L Deemed to be University, India. His research interests include design and analysis, modelling and simulations, robotics and mechatronic systems.



**A. Srinath** is a Professor in Mechanical Engineering, K L Deemed to be University. He completed his Ph.D. in Robotic Mechanisms from National Institute of Technology-Raipur in 2008. Awarded the Career Award for Young Teachers (CAYT) from AICTE in 2006. Right now, he is handling research projects worth over Rs.45 Lakhs from UGC, DST and AICTE in the field of medical robots for surgical and clinical applications. His research interests include machine learning algorithms, medical robots, artificial intelligence and data analytics.